

Score Cutting Tool - SCT

G3 S3



One tool - two cutting methods. The Scoring Cutting Tool can be used for through-cutting and scoring applications involving materials up to 5 mm / 3/16" thick.


The Scoring/Cutting Tool is used for scoring as well as through-cutting a wide range of materials up to a thickness of 5 mm / 3/16". Zünd recommends the SCT especially for carton and varnishing-plate applications. The cutting/scoring process is performed with drag knives.

Through-cut: For through-cutting, the blade is pneumatically extended for cutting with

the entire length of the cutting edge if necessary. The desired cutting depth can be set in the cutter software or Zünd Cut Center.

Score: For scoring, the blade is pneumatically retracted for cutting a specified distance into the material. The scoring depth is set manually on the SCT tool itself. The glideshoe presses down on the substrate with constant pressure while the blade cuts down to the set depth.

This guarantees consistent, high-quality scores. All flat-stock drag knives Zünd offers can be used with the SCT. An optional, spring-loaded glide shoe is available for processing particularly challenging materials.

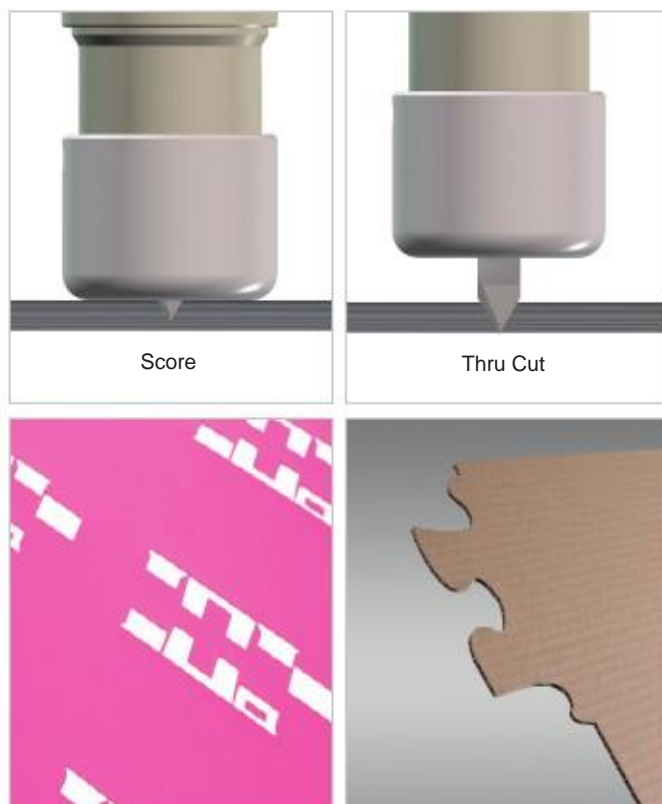

Details:

For a wide range of materials up to 5 mm / 3/16" thick.

Pneumatically-controlled switching between two functions, Score and Thru-Cut.

Advantages at a glance:

Very high processing speeds (material-dependent).

Two processing modes: score, through-cut.

Wide range of available flat-stock blades
(See Zünd Consumables & Accessory Catalog).

The SCT and both processing modes, «Thru Cut» and «Score», are fully supported in ZCC.



ZundPolska channel



KSM Kumor, Stańdo Sp. J. C.A.T.

Headquarter :

KSM Kumor, Stańdo Sp. J. C.A.T.

29th Ludźmierska St. · 34-400 Nowy Targ · T +48 18 264 97 20-21 · F +48 18 264 97 22 · biuro@zund.pl · www.zund.pl

Scan this QR code:

